

Design and Analysis of a New Soft-Switching Multi-Output Fly-Back Converter

M.AJITH KUMAR ^{#1}, N.BHASKARA RAO ^{*2}

^{#1}PG Student, Dept. of EEE, Gudlavalleru Engineering College, JNTU KAKINADA University, Andhra Pradesh, India

^{#2}Assistant Professor, Dept. of EEE, Gudlavalleru Engineering College, JNTU KAKINADA University, Andhra Pradesh, India

¹ajith.mgist0218@gmail.com, ²bhaskar07206@gmail.com.

Abstract— This paper presents a new multioutput converter. Demand for multiple output power supplies with low voltage and high current has increased. A multi output converters needs to satisfy these conditions such as efficiency, voltage regulation, isolation and size. The fly back converter is the most attractive because of its relative simplicity compared with other topologies used in low power applications and we get multiple outputs. The proposed fly back converter operated at zero-voltage-switching ZVS turn -on and zero-current-switching ZCS turn -off process. The operational principle, analysis, and design considerations of the proposed converter are presented in this paper.

INDEX TERMS— FLY-BACK CONVERTER, MULTI OUTPUT, ZERO CURRENT SWITCHING [ZCS], ZERO VOLTAGE SWITCHING [ZVS].

I. INTRODUCTION

The Utilization demand for multiple-output power supplies with low voltage and high current has increased [1] – [5], specifically in medical application that is therapeutic ultrasound. A multi-output converter needs to satisfy these conditions such as high efficiency at any load condition, voltage regulation, isolation and compact size. The Fly-back topology is the most attractive because of its relative simplicity compared with other topologies used in low power applications and we can easily achieve multiple outputs. The high frequency Fly-back transformer [6] serves the dual purpose of providing energy storage as well as converter isolation and minimizing the magnetic component count when compared with the forward converter. The Conventional Fly-back converter has found to be suitable for low input voltage and low-medium-power applications.

In recently many of the soft switching techniques are developed [7]-[14]. The soft switching schemes [7]-[8] with variable switching frequency have been proposes to reduce the size of power converters and switching losses on power semiconductors. The many techniques were developed in [9]- [11] to achieve zero voltage

switching, and zero current switching [12]-[14] turn-on. In half bridge fly-back converter proposed in [5] [10] the voltage across the switches is not greater than the input voltage, causing the short circuit of the auxiliary switch snubber capacitor during turn on. The switch current is limited by only it's on state resistance, which would damage the switch during turn on due to the flow of large current at the instant of turn on.

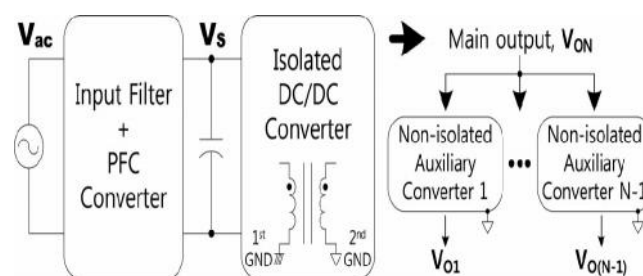


Fig 1. Block diagram of N multioutput power supply with nonisolated auxiliary converter

Fig1 shows the block diagram of typical N multioutput power supply with nonisolated converters. The isolated dc/dc converter has dc input voltage V_s , which comes from the input filter and power factor correction converter in ac line. It has the main output and, from this, auxiliary ones are made with a same ground. A new isolated

multioutput dc/dc converter is proposed. The proposed converter is based on the half-bridge fly back converter for the main output and buck converters for the auxiliary outputs.

The proposed converter integrated with the secondary fly back rectifier. This integration makes simple structure, and lower transformer size, and of main switch is operates at zero voltage- switching turn-on and zero-current-switching turn-off condition are achieved to gate control without additional components. In addition, cross regulation problems among the outputs do not occur. The auxiliary switch and the other semiconductor devices are operate at zero-current-switching turn-on and turn-off condition. The principle of operation, theoretical analysis of the proposed multi-output Fly-back converter rated 130W and operating at 100 kHz, provided to verify its performance.

PRINCIPLE OF OPERATION

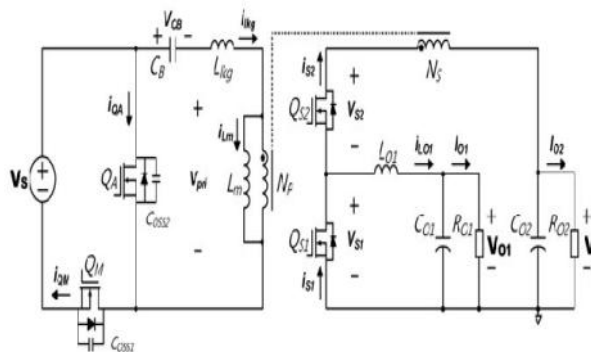


Fig 2. Conventional Fly back converter with two outputs

In conventional circuit have the two outputs and two switches in the both fly back converter and transformer secondary side which causes additional losses the operation is divided into six modes. The main operation for the both conventional and proposed operated one on duty cycle D and other one is compliment to it of the primary side. On the secondary side switches are removed and transformer turns are increased to get the multiple outputs.

The proposed multioutput Fly-back converter shown in Fig.3. The circuit can divided in two parts. The first part is a conventional Fly-back converter, which is responsible for power

transferred into the load. It is composed of an isolated

Multi-winding transformer, a main switch Q_m , output diodes

D01, D02, D03& D04, and output filter C01, C02, C03 & C04. The

Second part is commutation cell to provide the ZVS-ZCS to

the main switch Q_m . It is composed of the resonant inductor L_{1kg} , the resonant capacitor C_B , and auxiliary switch Q_a . This section provides the soft-commutation functions to the power semiconductor devices of the Fly-back Converter.

The proposed Fly-back converter transformer is total five

Windings, one primary winding and four secondary windings. In these four secondary windings, three windings are for positive voltage outputs and connected in series to reduce the number of turns and height of transformer, but it will increase the thickness of the wire. Fourth winding is for negative voltage. The input voltage is 30V and the output ratings are +38V/1.25A, +18V/2A, +5V/1.25A and -18V/2A.

The three dynamic equivalent circuits of the proposed Fly back converter during one switching period is explained below.

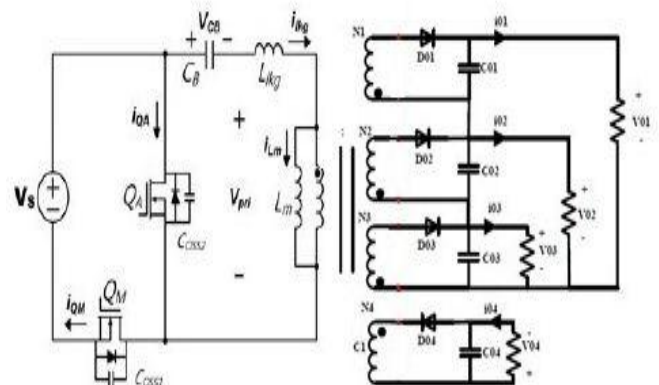



Fig 3. Block diagram of proposed Multi output Fly back converter

Operating modes and analysis:

Mode 1 [t_0, t_1]: Mode 1 begins when S1 is ON S2 is OFF current flows from Switch S1 to primary of transformer. During this mode diodes D₀₁, D02, D03 and D₀₄ are forward biased.

$$i_{lkg}(t) = i_{Lm}(t) + i_{LO1}(t)/n,$$

$$i_{Lm}(t) = \frac{V_S - V_{CB}}{L_m + L_{lkg}}(t - t_0) + i_{Lm}(t_0),$$

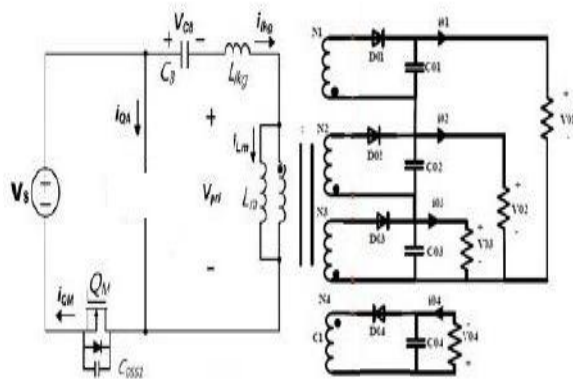


$$w_s = \frac{1}{\sqrt{LrCeq}} \text{ and } C_{eq} = \frac{C1Cr}{C1+Cr}$$

Mode 2 [t_1, t_2]: During this Mode Switch S1 is OFF S2 is ON the diodes D₀₁, D02, D03 and D₀₄ are reverse biased. During this period the capacitors power to load.


$$i_{lkg}(t) = -\frac{V_{CB} - nV_{O2}}{L_{lkg}}(t - t_3) + i_{lkg}(t_3),$$

$$i_{Lm}(t) = -\frac{nV_{O2}}{L_m}(t - t_3) + i_{Lm}(t_3),$$

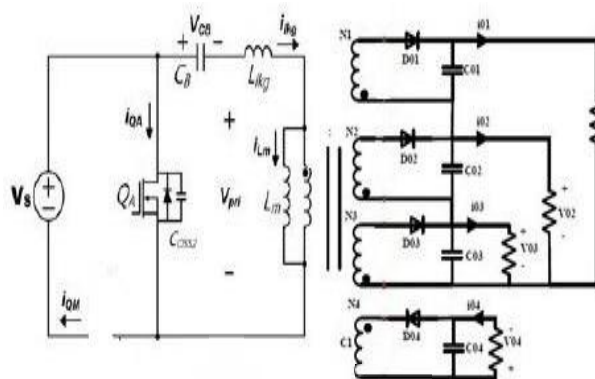

$$w_s = \frac{1}{\sqrt{LrCeq}} \text{ and } C_{eq} = \frac{C1Cr}{C1+Cr}$$

Mode 3 [t_2, t_3]: During Mode 3 both S1 and S2 is turned OFF current stored by magnetizing inductor is discharged through primary winding of transformer. Due to this the diodes D₀₁, D02, D03 and D₀₄ are forward biased.

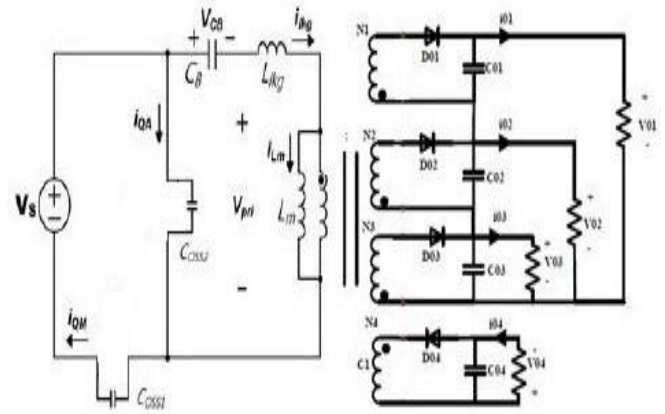

$$\omega = \frac{1}{\sqrt{2L_{lkg}C_{oss}}},$$

$$Z = \sqrt{\frac{L_{lkg}}{2C_{oss}}}.$$

DESIGN CONSIDERATION

The gating signals for the primary side switches of the converter are given below which operate system correctly.

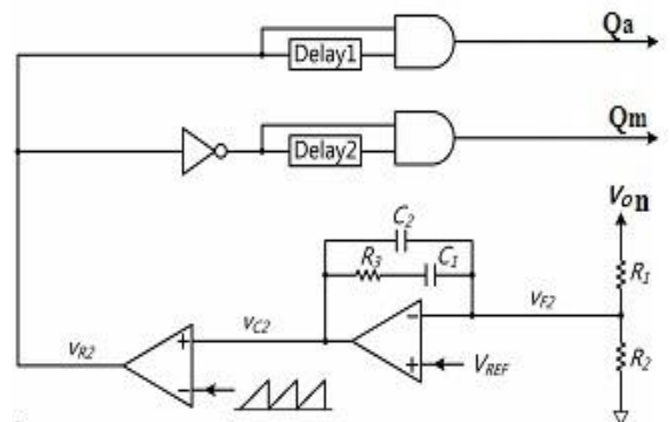


Fig 5. Gate signals

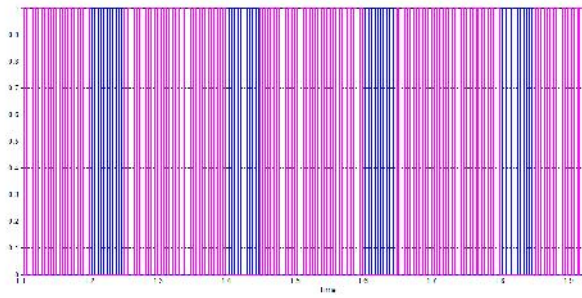


Fig 6. Gate Signals S1 & S2 of Proposed Converter

A. Design of voltage Transformer Ratio:

The turn's ratio design of proposed converter is similar to the conventional Fly-back converter. The transformer voltages ratios are 1:N1, 1:N2, 1:N3, 1:N4. The turn's ratio can be calculated as follows.

$$V_{03} = \frac{N3 \cdot D}{(1-D)} * V_{in} \quad (18)$$

$$V_{02} = V_{03} + \frac{N2 \cdot D}{(1-D)} * V_{in} \quad (19)$$

$$V_{01} = V_{03} + \frac{N1 \cdot D}{(1-D)} * V_{in} \quad (20)$$

$$V_{04} = \frac{N4 \cdot D}{(1-D)} * V_{in} \quad (21)$$

Design of transformer magnetizing inductance:

The Fly-back transformer magnetizing inductance design is similar to the traditional Fly-back converter and can be calculated as follows

$$\frac{2Lm}{N2R0} < (1-D)T_s \quad (22)$$

Where R0 is the total equivalent resistance referred to primary side of transformer $R'0 = N2R0$

$$\frac{2Lm}{R'0} < (1-D)T_s \quad (23)$$

Design of output filter capacitance:

Design of the output filter capacitor is based on the output

Voltage ripples specifications.

$$C_o = \frac{Dvo}{FsRo\Delta V} \quad (24)$$

Where V is the peak – peak ripple voltage ac component

of the voltage across the capacitor.

Design of resonant components:

The resonant inductance selected based on the maximum value of the auxiliary switch current. To turn ON auxiliary switch with ZCS, the required series inductor Lr is can be calculated as follows.

$$\frac{(Vin + nvo + Vcro)}{Lr} t_{ro} \leq I_{imax} \quad (25)$$

Here, t_{r0} is rise time of the auxiliary switch $Vcro$ is the initial voltage of resonant capacitor and $lk L$ is the leakage inductance of the transformer. The resonant capacitor Cr is determined depending on the transient intervals. The sum of the transient intervals selected to be smaller than 30% of the switching period. The transient intervals are $t0$ - $t6$.

$$T_r = 2\pi\sqrt{LrCr} \quad (26)$$

The inductance Ls is selected maximum value of the current

through it.

SIMULATION RESULTS

The simulation results are shown in Fig.3. The specification of the converter is 100 KHz switching frequency. The main switch is turn on under ZVS and turn off under ZCS condition. The auxiliary switch and other semiconductor devices are operated under ZCS condition are shown in Fig.3.

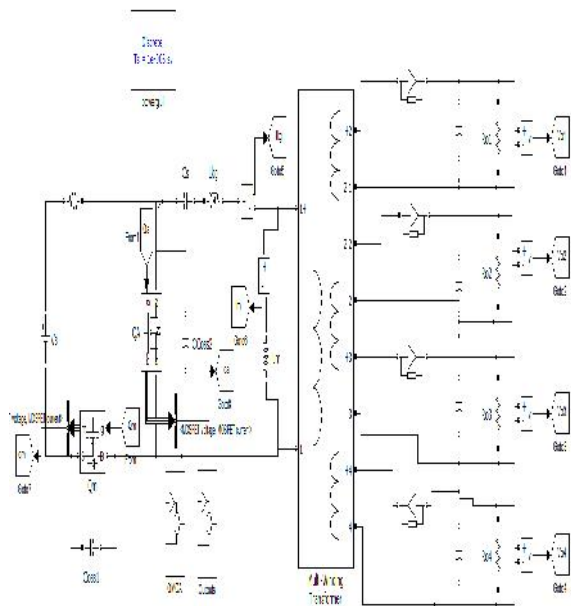


Fig 7 Matlab/Simulink Diagram

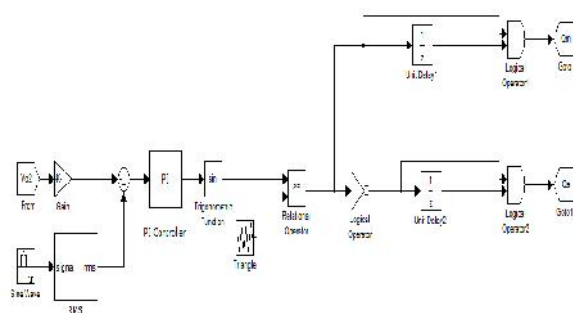


Fig 8. S1 & S2 Control Circuit of Proposed Converter

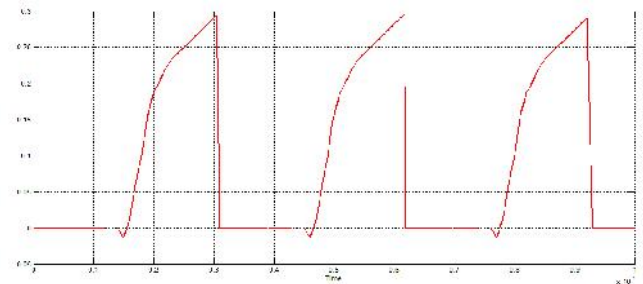


Fig 9. Apply ZVS on S1 & S2 switches of Proposed Converter

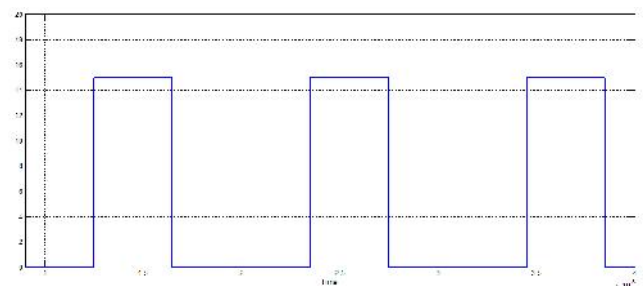


Fig 10. Apply ZCS on S1 & S2 switches of Proposed Converter

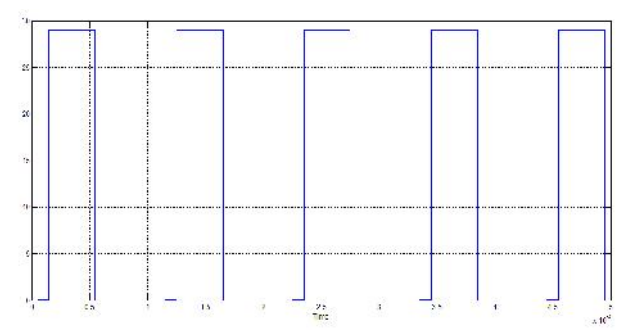
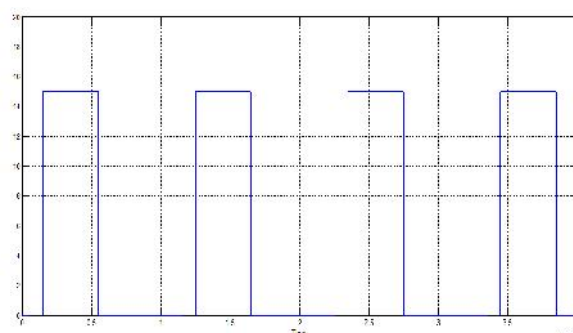


Fig 11. Transformer Primary Voltage

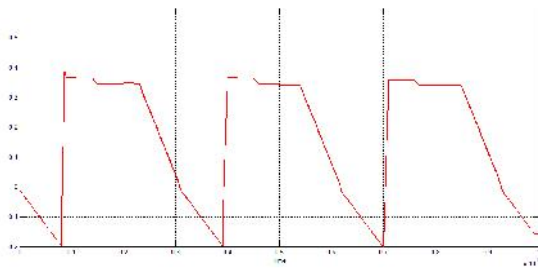


Fig 12. Leakage Current of Inductor

Table-1 TRANSFORMER PRIMARY AND SECONDARY TURNS

PRIMARY TURNS	SIDE	SECONDARY TURNS	SIDE
		67	
53		32	
		9	
		32	

Table-2 OUTPUT VOLTAGES

Conventional Technique	With Proposed Technique
12v	38v
	18v
24v	5v
	-18v

CONCLUSION

This paper presents a Complete simulation of Fly back converter with ZVS-ZCS is achieved for all the switches by gate control without additional components to get the multiple outputs. High efficiency is obtained under entire load conditions with reduced switching stress because secondary side switches are eliminated. No cross regulation problems occur. The proposed converter is suitable for multioutput power supply which requires the outputs with same ground.

REFERENCES

- [1] Jae-Kuk Kim, Jae-Bum Lee, Student Member, IEEE, and Gun-Woo Moon, Member, IEEE.
- [2] Y. Jang and M. M. Jovanovic, "Light-load efficiency optimization method," *IEEE Trans. Power Electron.*, vol. 25, no. 1, pp. 67–74, Jan.2010.
- [3] H. S.-H. Chung, S. Y. Hui, and W.-H. Wang, "A zero-current-switching PWM flyback converter with a simple auxiliary switch," *IEEE Trans. Power Electron.*, vol. 14, no. 2, pp. 329–342, Mar. 1999.
- [4] C. Ji, M. Smith, Jr., K. M. Smedley, and K. King, "Cross regulation in flyback converters: Analytic model and solution," *IEEE Trans. Power Electron.*, vol. 16, no. 2, pp. 231–239, Mar. 2001.
- [5] S.-Y. Cho, I.-O. Lee, J.-K. Kim, and G.-W. Moon, "A new standby structure based on a forward converter integrated with a phase-shift full-bridge converter for server power supplies," *IEEE Trans. Power Electron.*, vol. 28, no. 1, pp. 336–346, Jan. 2013.
- [6] Q. Chen, M. M. Jovanovic, and F. C. Lee, "Analysis and Design of Weighted Voltage-Mode Control for a Multiple-Output Forward Converters," *Applied Power Electronics Conf*, Mar. 1993 pp. 449- 455, .
- [7] L. K. Kaushik, and M. K. Pathak, "An improved multiple output forward Converter topology," *Int. Conference on Power Electronics and Drives Energy Syst.*, 2010, pp. 1–6.,
- [8] H.S. Kim, J.H. Jung, J.W. Baek, and H.J. Kim, "Analysis and Design of a Multioutput Converter Using Asymmetrical PWM Half-Bridge FlybackConverter Employing a Parallel–Series Transformer," *IEEE Trans. on Industrial Electronics*, vol. 60, pp.3115-3125, Aug 2013
- [9] O.Garcia, J.A. cobos, P. Alou, R.Prieto, and J.Uceda, "A simple single switch single-stage ac/dc converter with fast output voltage regulation," *IEEE Trans. Power Electron.*, vol 17, pp. 163– 171, 2002
- [10] C.A.canesin., and I.Barbi, "Novel zero-current-switching PWM converters," *IEEE Trans. Ind. Electron.*, vol 44, pp. 372– 381, 1997.
- [11] G.hua, and F.C.lee, "Soft-switching techniques in PWM converters," *IEEE Trans. Ind. Electron.*, vol. 42, pp. 595– 603, 1995.
- [12] T. M. Chen and C.-L. Chen, "Analysis and design of asymmetrical half bridge Fly-back converter," *IEE Proc. in Elect. Power Appl*, vol. 1, pp. 433–440. Nov. 2002

- [13] J.-H. Jung, and J.-G. Kwon, "Soft switching and optimal resonance conditions of APWM HB Fly-back converter for high efficiency under high output current," *IEEE conference PESC*, 2008, pp. 2994–3000.
- [14] B.R. Lin, and J. J. Chen, "Analysis of an integrated Fly-back and zeta converter with active clamping technique," *IET Power Electronics.*, vol. 2, pp. 355–363, May 2009.
- [15] H. S. H Chung, S. Y. Hui, and Wei-Hua Wang, "A Zero-Current- Switching PWM Fly-back Converter with a Simple Auxiliary Switch," *IEEE Trans. on power electronics*, vol. 14, pp.329-342 Mar 1999
- [16] C. M. Wang, "A Novel ZCS-PWM Fly-back converter with simple ZCS-PWM commutation cell," *IEEE Trans. Ind. Electron.*, vol. 55, pp. 749-757, Feb. 2008.
- [17] N. Kasa, T. Iida, and L. Chen, "Fly-back inverter controlled by sensorless current MPPT for photovoltaic power system," *IEEE Trans. Ind. Electron.*, vol. 52, pp. 1145–1152, Aug. 2005.